

轮辐式称重传感器 1~200tf

SL410



特点


- 适用于压缩/拉伸应用
- 漆面钢
- 防护等级IP67
- 密封结构

可选

- 不锈钢: LL410 (MOQ Base)



额 定 量 程 (R.C)	单位	1, 2, 3, 5, 10, 20, 30, 50, 100, 200tf
额定输出(R.O)	mV/V	2.0 ± 0.005
零点平衡	mV/V	0 ± 0.02
综合误差	%	0.05
重复性	%	0.02
蠕变(30min)	%	0.03
温度的影响		
零点值	%/10°C	0.03
输出值	%/10°C	0.03
激励电压		
推荐值	V	10
最大值	V	15
电阻值		
输入	Ω	350 ± 3.5
输出	Ω	350 ± 3.5
绝缘	MΩ	>2,000@DC 50V
温度补偿范围	°C	-10 ~ +40
工作温度范围	°C	-20 ~ +80

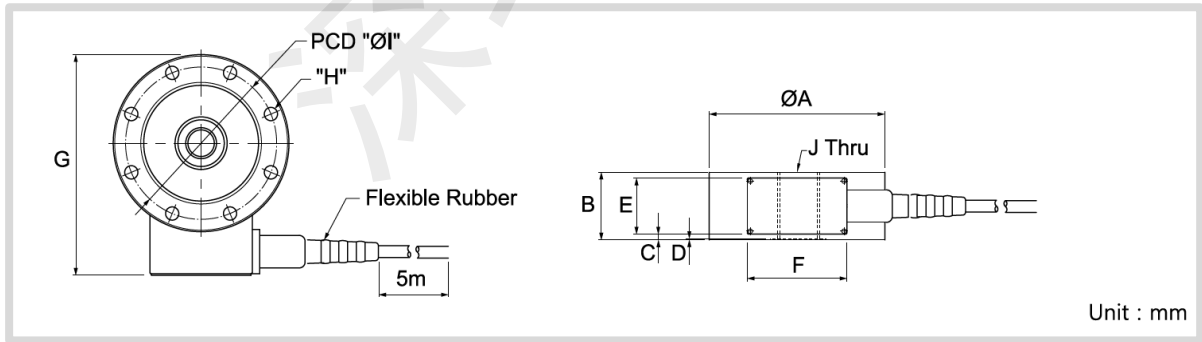

STANDARD
CABLE LENGTH

5M

CABLE COLOR CODE

EXC +	(RED)
EXC -	(WHITE)
SIG +	(GREEN)
SIG -	(BLUE, BLACK)
SHLD	(YELLOW)

量程	øA	B	C	D	E	F	G	øH	øI	J
1tf	112	46	4	1	38	68	139.5	8-ø6.6	97.2	M16xP2.0
2tf										
3tf										
5tf	120	46	4				149.5	8-ø9	103.2	M18xP1.5
10tf	138	60	11				167.5	8-ø11	117.6	M24xP2.0
20/30tf	184	80	21				213.5	8-ø14	157.6	M39xP2.0
50tf	200	60	11				229.5	8-ø14.3	170	M45xP3.0
100tf	278	90	26				307.5	16-ø16.3	229	M70xP3.0
200tf	335	108	35				384.5	12-ø26	298	M90xP3.0