


HS-AM 磁石平面安装基座

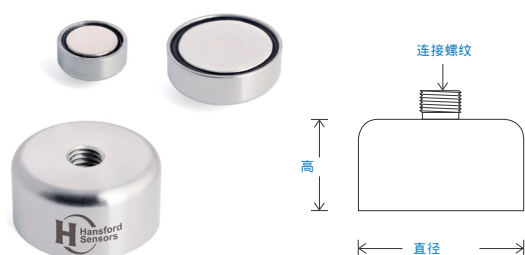

我们制造一系列的配件与我们的工业加速度配套使用，以获得一个牢固的安装


磁石平面安装基座提供了一个牢固的永久或半永久连接一个平面，工作温度可达120摄氏度

型号	直径	螺纹	拉拔强度	高度	
HS-AM027	20mm	1/4"-28 UNF Male	12kg	8mm	
HS-AM028	20mm	M6 Male	12kg	8mm	
HS-AM029	20mm	M8 Male	12kg	8mm	
HS-AM030	20mm	10-32 UNF Male	12kg	8mm	
HS-AM009	25mm	1/4"-28 UNF Male	13.5kg	8mm	
HS-AM006	25mm	M6 Male	13.5kg	8mm	
HS-AM007	25mm	M8 Male	13.5kg	8mm	
HS-AM024	25mm	10-32 UNF Male	13.5kg	8mm	
HS-AM008	25mm	Q-Fit Male	13.5kg	14mm	
HS-AM014	25mm	1/4"-28 UNF Female	13.5kg	15mm	
HS-AM015	25mm	M5 Female	13.5kg	15mm	

HS-AM 磁石平面安装基座

型号	直径	螺纹	拉拔强度	高度	
HS-AM016	25mm	M6 Female	13.5kg	15mm	
HS-AM017	25mm	M8 Female	13.5kg	15mm	
HS-AM031	30mm	1/4"-28 UNF Male	25kg	10mm	
HS-AM032	30mm	M6 Male	25kg	10mm	
HS-AM033	30mm	M8 Male	25kg	10mm	
HS-AM034	30mm	10-32 UNF Male	25kg	10mm	
HS-AM045	30mm	1/4"-28 UNF Female	25kg	16mm	
HS-AM046	30mm	M6 Female	25kg	16mm	
HS-AM047	30mm	M8 Female	25kg	16mm	
HS-AM019	40mm	1/4"-28 UNF Male	50kg	9mm	

HS-AM磁石-磁极片安装基座

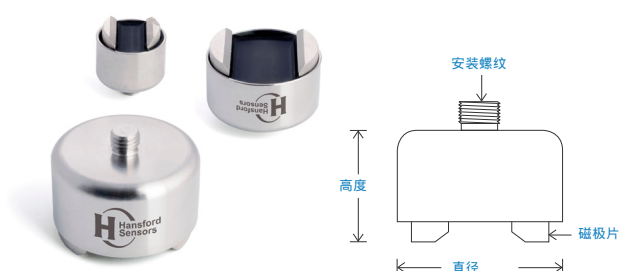

我们制造一系列的配件与我们的工业加速度配套使用，以获得一个牢固的安装

磁石-磁极片安装基座提供了一个牢固的永久或半永久连接一个平面，工作温度可达120摄氏度

型号	直径	螺纹	拉拔强度	高度	
HS-AM020	20mm	1/4"-28 UNF Male	8.5kg	17mm	
HS-AM001	25mm	1/4"-28 UNF Male	18kg	17mm	
HS-AM002	25mm	M6 Male	18kg	17mm	
HS-AM003	25mm	M8 Male	18kg	17mm	
HS-AM004	25mm	10-32 UNF Male	18kg	17mm	
HS-AM026	25mm	1/2" UNC Q-Fit Male	18kg	21mm	
HS-AM005	25mm	Q-Fit Male	18kg	23mm	
HS-AM010	25mm	M5 Female	18kg	23mm	
HS-AM011	25mm	M6 Female	18kg	23mm	
HS-AM012	25mm	1/4"-28 UNF Female	18kg	23mm	
HS-AM013	25mm	M8 Female	18kg	23mm	

HS-AM 磁石-磁极片安装基座

Part No.	Diameter	Thread	Pull Strength	Height	
HS-AM018	32mm	1/4"-28 UNF Male	20kg	20mm	 
HS-AM036	32mm	M6 Male	20kg	20mm	 
HS-AM037	32mm	M8 Male	20kg	20mm	 
HS-AM041	32mm	M6 Female	20kg	26mm	 
HS-AM040	32mm	M8 Female	20kg	26mm	 
HS-AM035	32mm	1/4"-28 UNF Female	20kg	26mm	 
HS-AM039	35mm	1/4"-28 UNF Male	35kg	33mm	 
HS-AM042	35mm	M5 Female	35kg	33mm	 
HS-AM043	35mm	M6 Female	35kg	33mm	 
HS-AM038	35mm	1/4"-28 UNF Female	35kg	33mm	 
HS-AM044	35mm	M8 Female	35kg	33mm	 